



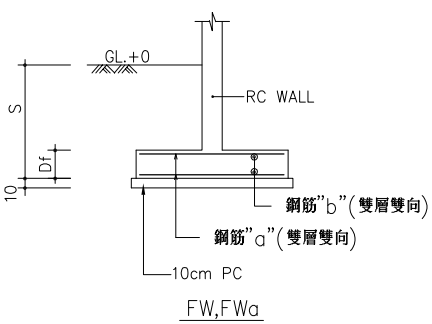
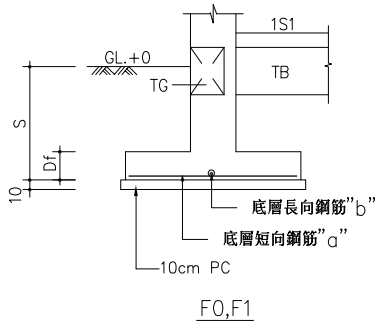









	C1	C0
2 floor		
柱尺寸	45 X 45	
柱主筋	• 8-#7	
梁柱接頭箍筋	#3 @ 10	
柱端部區箍筋	#3 @ 10 ,圖束長= 50	
柱中央區箍筋	#3 @ 15	
1 floor		
柱尺寸	45 X 45	40 φ
柱主筋	• 12-#7	• 8-#7
梁柱接頭箍筋	#3 @ 10	#3 @ 10
柱端部區箍筋	#3 @ 10	#3 @ 10
柱中央區箍筋	#3 @ 10	#3 @ 10




基礎	Lx (cm)	Ly (cm)	Df (cm)	S (cm)	鋼筋"a"	鋼筋"b"
F0	100	100	30	120	#4 @ 20	#4 @ 20
F1	180	180	40	120	#4 @ 20	#4 @ 20
FW	250	180	30	120	#3 @ 20	#3 @ 20
FWa	L	80	30	120	#3 @ 20	#3 @ 20

說明: 1. 基礎形狀與標位置依結構平面圖為準。
2. 開挖時若發現基礎下，土壤承载力不如預期時，須知會建築師，予以加強或改良。


基腳配筋

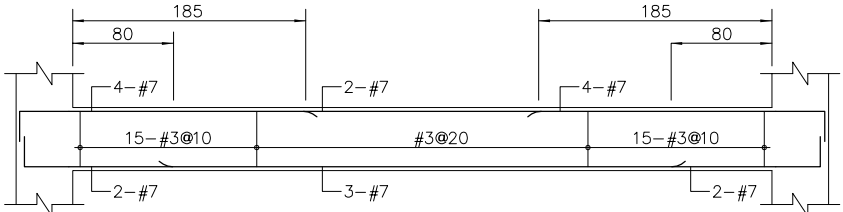


R G 1 (35X50)




R J 1 (30x50)

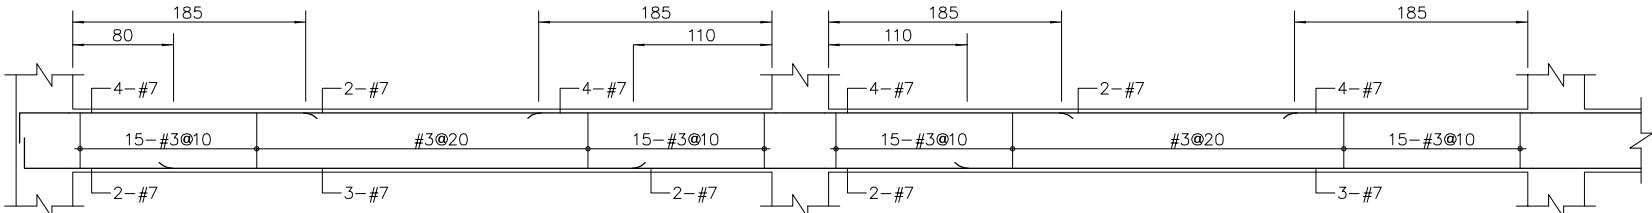


R B 2 (35X50)

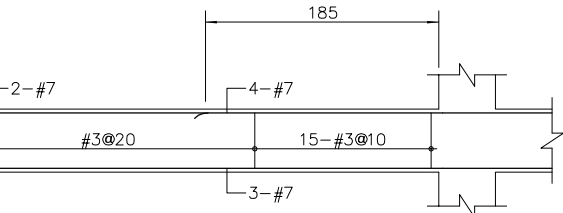


R B 3 (35X50)

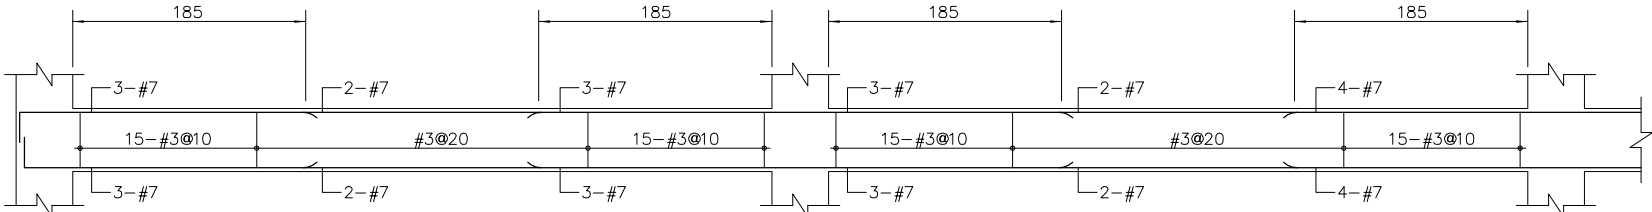


T B 2 (35X50)

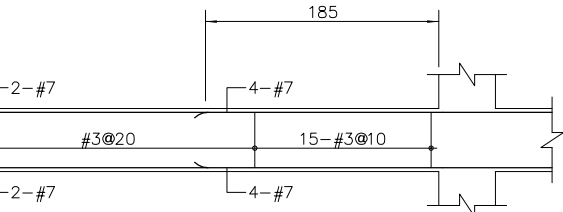


T B 3 (35X50)



R B 3a (35x68)



1-R B 0 (30x40)

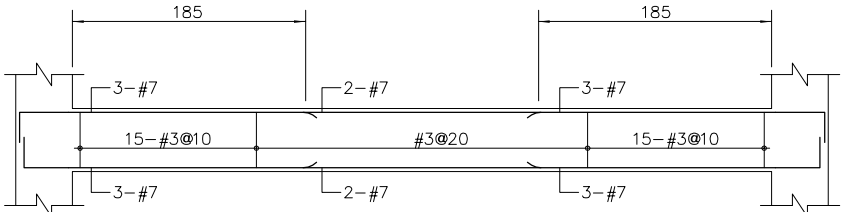

T G 1 (35X50)

d:\0697\97039\S2-1_97-05-20_08.28_Name.HU



蔡宜璋 建築師事務所

建築師：蔡宜璋

地址：台南市中西區康樂街179號

電話：06-2281239 傳真：06-2284248

電子信箱：tarcht@ms52.hinet.net

印鑑

簽章

鄉村地區住宅興建設計圖樣

內政部營建署頒製 (雲嘉南 地區 編號02 - C 型)

工程名稱	鄉村地區住宅興建設計圖樣—C型	比例尺	圖號 S2-1
圖號名稱	梁、版、柱、基腳配筋圖	單位 cm	張號
業務編號		圖紙 A3	35/36