

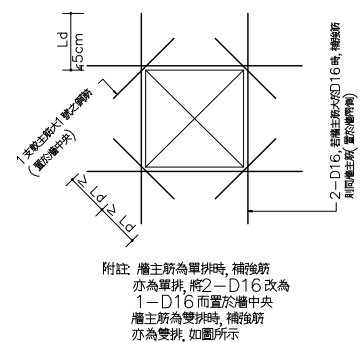


牆厚		W10	W12	W15	W15	W18,W20	W30	W35	W40	W50
平面										
水平筋		#3@20	#3@20	#3@15	#3@25	#3@20	#4@20	#4@20	#4@15	#4@12
垂直筋		#3@15	#3@15	#3@15	#3@15	#4@15	#4@15	#4@15	#4@18	#4@10
開口補強	水平筋	1-#3	1-#4	1-#5	2-#4	2-#5	2-#5	2-#5	2-#6	2-#6
	垂直筋	1-#3	1-#4	1-#5	2-#4	2-#5	2-#5	2-#5	2-#6	2-#6
	斜向筋	1-#3	1-#4	1-#5	1-#5	2-#5	2-#5	2-#5	2-#6	2-#6

說明：1. 15cm, 16cm 牆做為內隔牆時，則須雙排配筋
2. 固定筋之水平間距為垂直筋間距之五倍，垂直間距為水平間距之四倍
3. 除特別說明外，其餘配筋按本表施工。

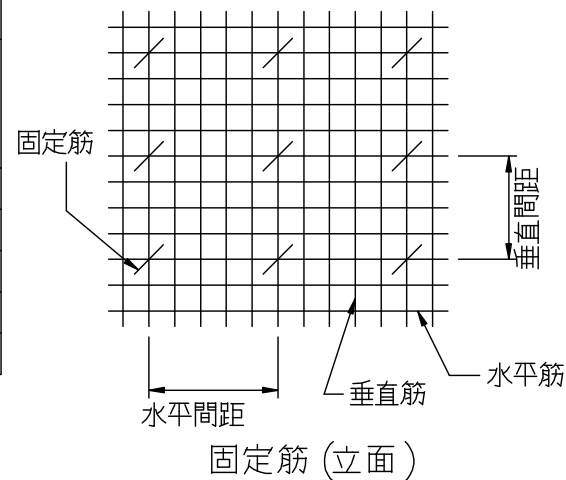

陳維凱建築師事務所
建築師 陳維凱
地址： 台中市西區大興17街74號5F
電話： 04-23269696 傳真： 04-23269797
電子信箱： weikai.arch@msa.hinet.net



鄉村地區住宅興建設計圖樣

內政部營建署頒製 (中 彰 投 地 區 編 號 01 A 型)

工程名稱

中彰投地區—01—A型

圖號名稱

標準配筋詳圖6

業務編號

比例尺

圖號 S0-06

單位 cm 或 m^2

A3

張抗 