

## 1. APA-The Engineered Wood Association



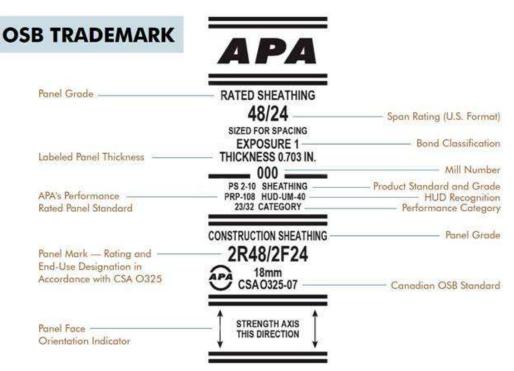

MANUFACTURER INFORMATION

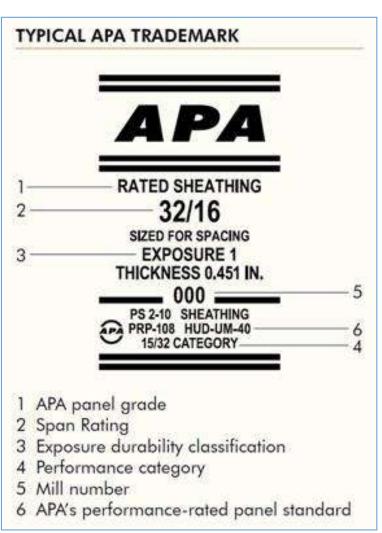

**PS 2 - XX** 

**EXPOSURE 1** 

FLOOR SPAN®

20 OC

19/32 CATEGORY

\* STRENGTH AXIS \* THIS DIRECTION \*

MILL NO.

THICKNESS 0.563 IN

3. Timber Products Inspection

AUDITED BY

AUDITED BY

PS 2-10 EXPOSURE 1 SINGLE FLOOR SPAN 23/32 CATEGORY 24 oc SIZED FOR SPACING PS 2-10 EXPOSURE 1 SHEATHING SPAN RATED 23/32 CATEGORY 48/24 SIZED FOR SPACING

CLIENT MILL XXX CLIENT MILL XXX

THICKNESS 0.703 IN.

THICKNESS 0.703 IN.